




# Sans-Serif

Podestrian Scale —  
Low Wattage

- Stark, geometric form
- Broad, even distribution
- Vandal-resistant

The Sans Serif series is available in a variety of applications, including slipfitters for concrete and round tapered poles, steel poles, straight sq. steel poles, mast arms and horizontal and vertical tenons.

ATTACHMENT TO  
DESIGN CONTROL GUIDELINES

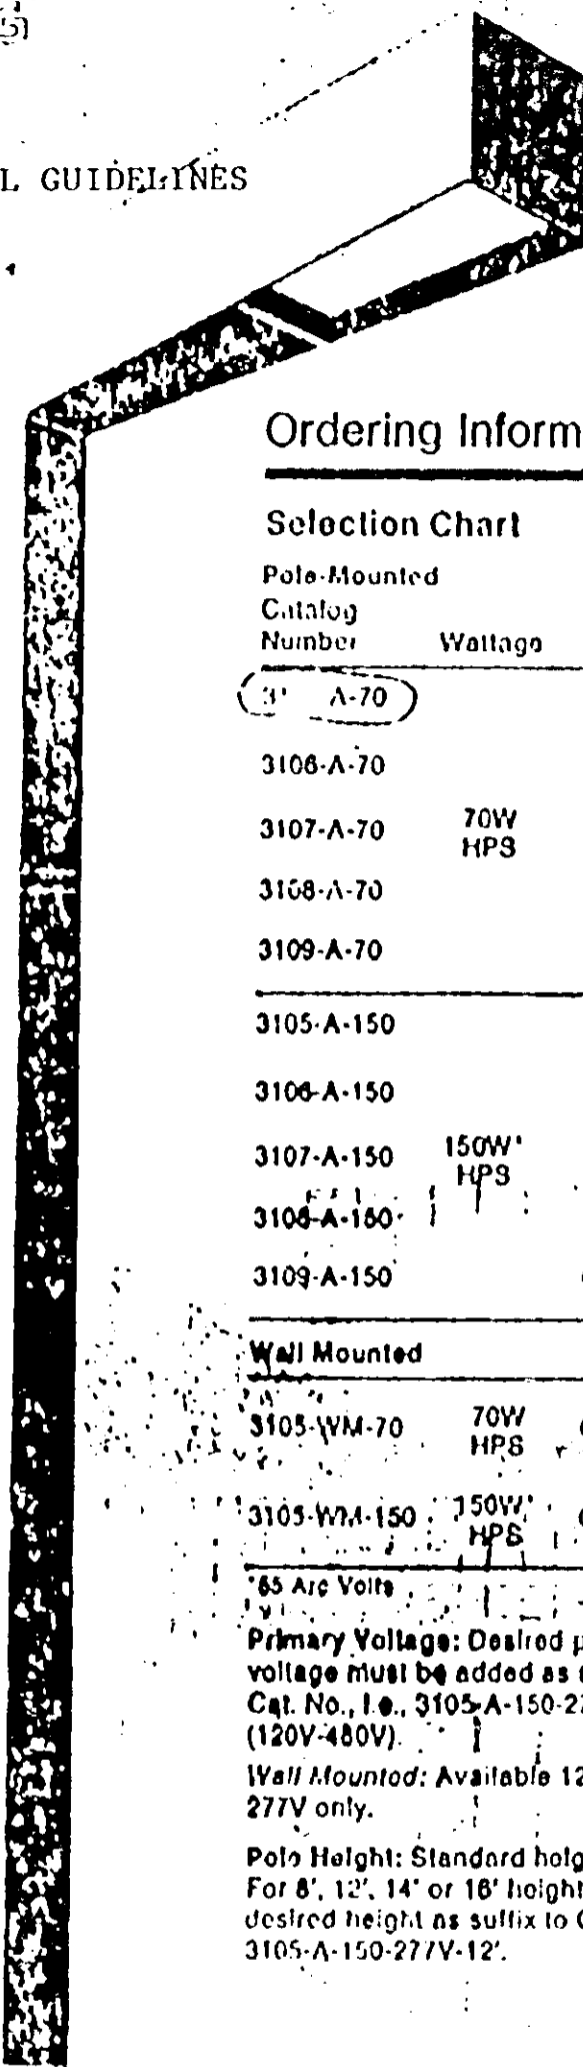

## Ordering Information

### Selection Chart

Pole-Mounted Catalog Number	Wattage	Luminaire Arrangement
3106-A-70	70W HPS	One
3107-A-70		Twin (180°)
3108-A-70		Twin (90°)
3109-A-70		Triple
3105-A-150	150W HPS	One
3106-A-150		Twin (180°)
3107-A-150		Twin (90°)
3108-A-150		Triple
3109-A-150	Quad	

### Wall Mounted

3105-WM-70	70W HPS	One
3105-WM-150	150W HPS	One

85 Arc Volts

**Primary Voltage:** Desired primary voltage must be added as suffix to Cat. No., i.e., 3105-A-150-277V (120V-480V).

**Wall Mounted:** Available 120 or 277V only.

**Pole Height:** Standard height is 10'. For 8', 12', 14' or 16' height, add desired height as suffix to Cat. No., i.e., 3105-A-150-277V-12'.

## Optional Equipment

**Finish:** To change from standard finish to lightfast Duranodic or Kalcolor, or to bronze or black paint, add desired finish as suffix to Cat. No., i.e., 3105-A-150-277V-Duranodic 313.

**Photocell Receptacle:** To add photocell receptacle to standard luminaire, add suffix to Cat. No., i.e., 3105-A-150-277V-PC. Photocontrol to fit receptacle, add "DP" as suffix to Cat. No., i.e., 3105-A-150-277V-LRDP.

**Flush Hinge Base:** (4" sq. pole only) For cast aluminum base flush with grade, add "FHB" as suffix to Cat. No., i.e., 3105-A-150-277V-FHB.

**Base Collar Extension:** To increase conduit area and depth of surface base (max. three 2" conduits), add "BCE" as suffix to Cat. No., i.e., 3105-A-150-277V-BCE.

**Weatherproof Receptacle:** Consult factory.

**6" Square, Straight Aluminum Pole:** Available for pole heights from 8' to 20', suitable up to four luminaires; specify by adding "ST-5" as suffix to Cat. No., i.e., 3105-A-150-277V-16'-ST-5.

## Vandalproofing Options:

**Lexan Lens:** For flat, clear Lexan shield under glass lens, add "LE" as suffix to Cat. No., i.e., 3105-A-150-277V-LE.

**Guard:** For fabricated protective steel guard furnished under standard lens, add "WS" as suffix to Cat. No., i.e., 3105-A-150-277V-WS.

For a coordinated approach to large area lighting refer to Section 9, pages 41-44 of your Moldcast catalog.

**Graphics:** For pole-mounted information signs, refer to Section 3, page 5 of your Moldcast catalog.

Section 9, page 40a

0049

4328 RV-2