


DETAIL USED FOR THE FOLLOWING ROAD CLASSIFICATIONS
 (DETERMINED BY COUNTY OF GREENVILLE):

- LOCAL RESIDENTIAL
- LOCAL COLLECTOR
- ALLEY

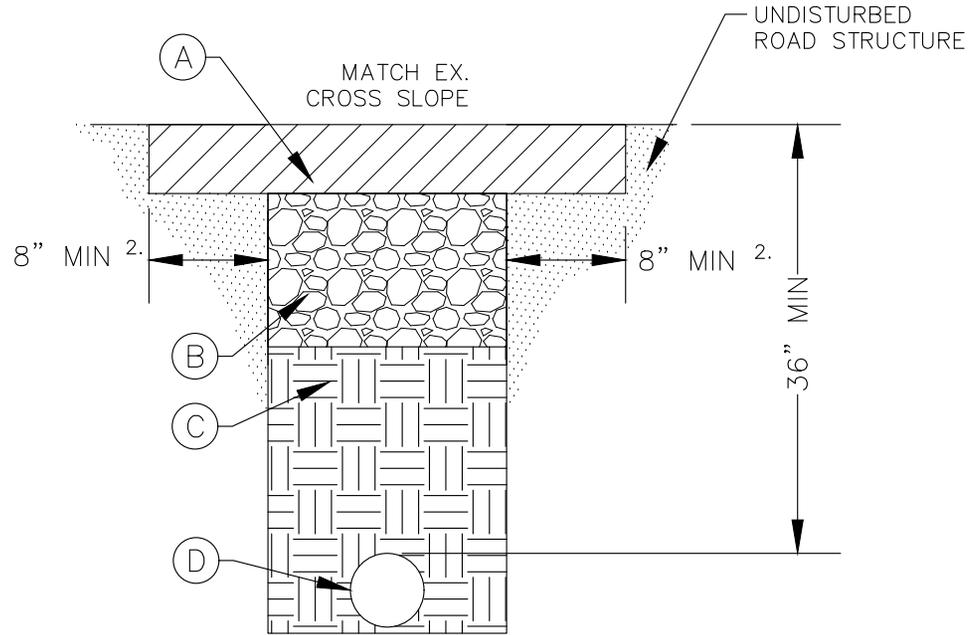

- (A) 4" HMA SURFACE COURSE TYPE C PER SCDOT STANDARD SPECIFICATIONS OR MATCH EXISTING THICKNESS, WHICHEVER IS GREATER. INSTALL IN 2" LIFTS
- (B) 8" GRADED AGGREGATE BASE COURSE COMPACTED TO 95% OF STANDARD PROCTOR DENSITY
- (C) SELECT BACKFILL MATERIAL COMPACTED IN 6" LIFTS TO 95% OF STANDARD PROCTOR OR #57 STONE INSTALLED IN 6" LIFTS
- (D) PIPELINE WITH BEDDING INSTALLED IN ACCORDANCE GREENVILLE COUNTY LAND DEVELOPMENT REGULATIONS

NOTES:

- 1.) ALL CUTS TO THE ASPHALT SHALL BE STRAIGHT AND VERTICAL SAW CUTS. UNDERCUT PAVEMENT AND/OR PAVEMENT DAMAGED DURING EXCAVATION SHALL BE REMOVED AND REPLACED PER THIS DETAIL.
- 2.) AN 8" MINIMUM OVERLAP OF ASPHALT OVER UNDISTURBED ROAD BASE SHALL BE INCLUDED ON ALL SIDES OF PATCH. EXCEPTIONS MAY BE GRANTED ON A CASE BY CASE BASIS.



STANDARD PAVEMENT REPAIR FOR
 PERPENDICULAR AND SHORT
 LONGITUDINAL UTILITY CUTS

Rev. Number

1

Rev. Date

6/2/2025

Scale:

NTS

Detail:

1-1