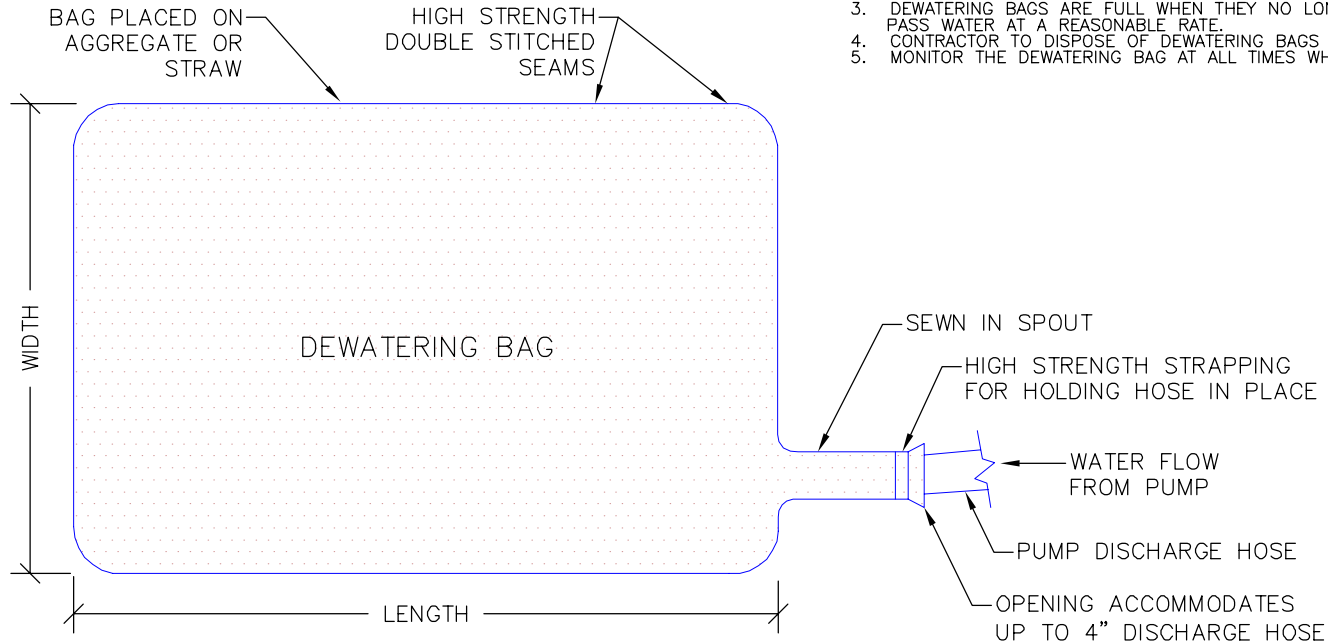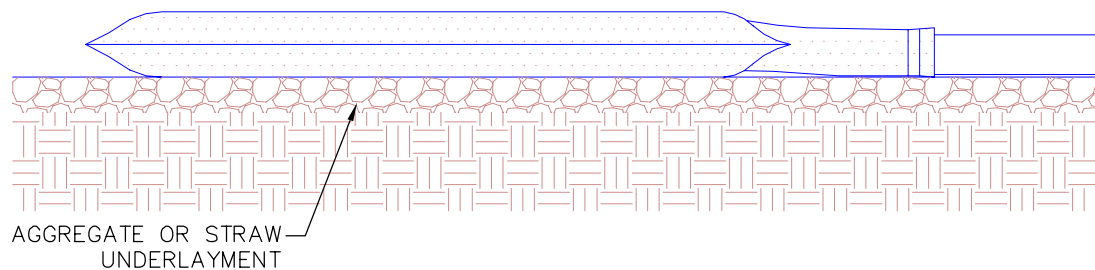# DEWATERING BAG
NT

NOTES:

1. FOLLOW ALL MANUFACTURER RECOMMENDATIONS FOR INSPECTION AND MAINTENANCE GUIDELINES.
2. REPLACE DEWATERING BAG WHEN TRAPPED SEDIMENT HAS ACCUMULATED TO 50% OF THE BAG CAPACITY OR IN ACCORDANCE WITH THE MANUFACTURERS RECOMMENDATIONS
3. DEWATERING BAGS ARE FULL WHEN THEY NO LONGER EFFICIENTLY FILTER OR PASS WATER AT A REASONABLE RATE.
4. CONTRACTOR TO DISPOSE OF DEWATERING BAGS AS DIRECTED BY THE ENGINEER.
5. MONITOR THE DEWATERING BAG AT ALL TIMES WHILE THE PUMP IS RUNNING.

BAG PLACED ON AGGREGATE OR STRAW

HIGH STRENGTH DOUBLE STITCHED SEAMS

WIDTH

DEWATERING BAG

SEWN IN SPOUT

HIGH STRENGTH STRAPPING FOR HOLDING HOSE IN PLACE

WATER FLOW FROM PUMP

PUMP DISCHARGE HOSE

OPENING ACCOMMODATES UP TO 4" DISCHARGE HOSE

LENGTH

TOP VIEW

AGGREGATE OR STRAW UNDERLAYMENT

SIDE VIEW

Greenville County
Storm Water Management

Greenville County

DEWATERING BAG

STANDARD DRAWING NO.   SC—09A

APPROVED BY: _____   January, 2018
GREENVILLE COUNTY STORM WATER MANAGEMENT   DATE